

LUMENTURE®

RWW160 RECESSED WALLWASHERS

TYPE: _____

PROJECT: _____



Lumenture's RWW160 is a sleek and straightforward, 1.65"-wide recessed wallwasher. With a centered pivot-point, the RWW160 can tilt 40 degrees in both directions, making it a versatile and easy-to-adjust fixture.



Weight
24 oz.



Wattage
14W - 1250 lumens



Input
120-277V
AC INPUT



Material & Finish
Extruded aluminum
body. Powdercoat



Movement
40° tilt



Life
50,000
hours






Accessories
Field replaceable
accessories



Dimmable
Triac, ELV &
0-10V



Optic
Custom
TIR optic

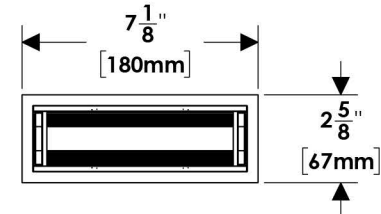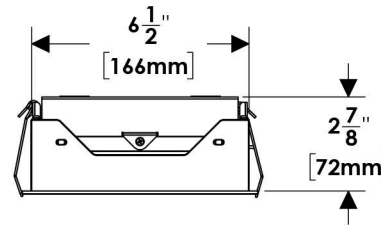

Please see page 2 for a full list of accessories.

ORDERING

FIXTURE	CCT/CRI*	BAFFLE COLOR	TRIM COLOR
RWW160 Recessed Wallwasher	27H - 2700K, CRI 90+	W - White B - Black C - Custom	W - White B - Black C - Custom
	30H - 3000K, CRI 90+		
	30V - 3000K, CRI90+, VividLight™		
	35H - 3500K, CRI 90+		
	40H - 4000K, CRI 90+		

*Custom options available, please consult factory.



ORDER EXAMPLE: **RWW160-30H-W-W**

Listings: certified to UL standard 1598 and CSA C22.2 No. 250.0-08 for damp locations



RoHS

Product specifications subject to change.



RWW160 RECESSED WALLWASHERS

TYPE: _____


PROJECT: _____

PHOTOMETRICS

Lumen output values fluctuate based on CCT and CRI. To estimate delivered lumen output of the various CCT/CRI options, multiply nominal lumens (1250 lumens) by the multiplier below.

CODE	CCT	CRI	TECHNOLOGY	MULTIPLIER
27H	2700K	90+	Standard	0.90
30H	3000K	90+	Standard	0.95
30V	3000K	90+	VividLight™	0.75*
35H	3500K	90+	Standard	1.00
40H	4000K	90+	Standard	1.00

RWW - Symmetric
Delivered Light Output: 1250 Lumens
Total Watts @120V: 14;
Lumens Per Watt: 94

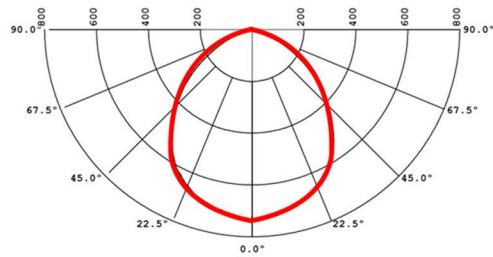


Lumenture maintains a lumen output tolerance of +/- 7.5%
*VividLight™ perceived brightness is significantly higher than measured lumens.




DIMMING

Dimming is standard and allows for smooth illumination below 5% with certain dimmers. Compatible with 0-10V, most triac (forward phase) and ELV (reverse phase) dimmers. For dimmer compatibility, refer to the Dimming Compatibility document on our website.

LENSES & LOUVERS



RWW160-HL
Black Honeycomb Louver



RWW160-B
Black Cross Baffle

RWW160-x

Lens Accessories

- CL** (Clear)
- G** (Green)
- LB** (Light Blue)
- R** (Red)
- RO** (Rose)
- Y** (Yellow)
- LS** (Linear Spread)
- SOL** (Solite)

Product specifications subject to change.

